




LINEN


MA²MA[®]

CARPET TILES

LINEN

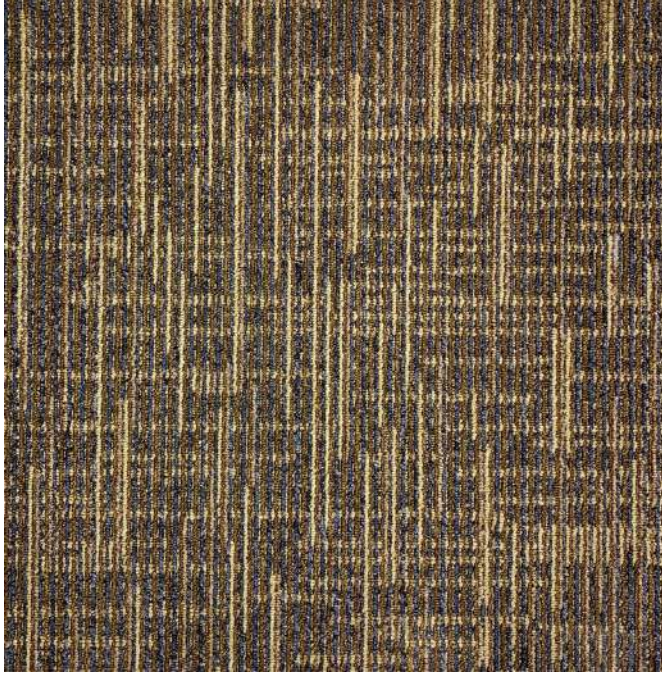


LINEN 746 FALCON

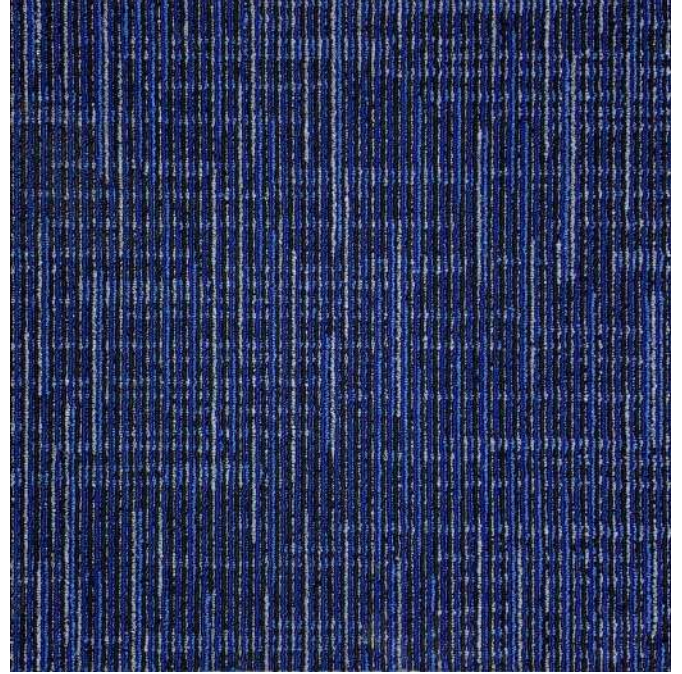

LINEN 756 KINGFISHER



LINEN 775 PIGEON

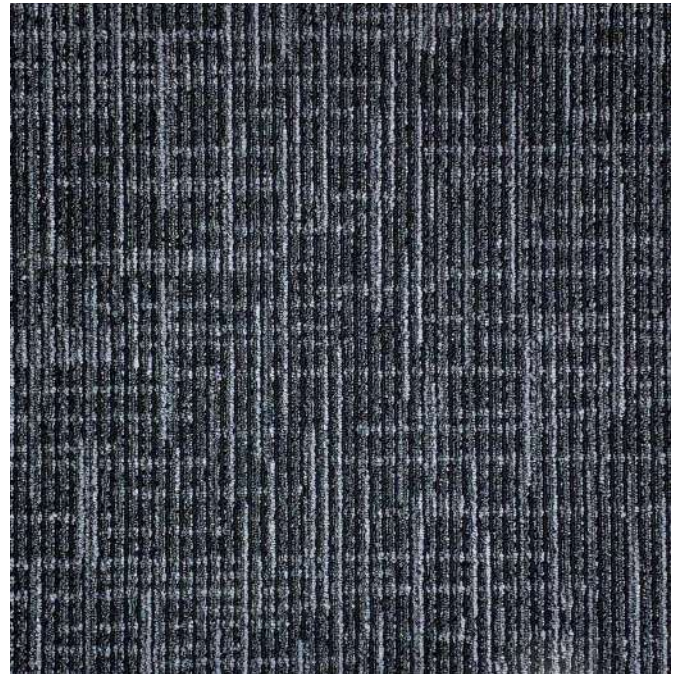

LINEN 778 HORNBILL

LINEN CARPET TILES

SPECIFICATIONS

Style	:	LINEN
Pile Fiber Composition	:	Solution Dyed Olefin (PP)
Yarn Type	:	BCF
Dye Method	:	Solution Dyed
Construction	:	Loop Pile
Backing Structure	:	StableShield 100% Vinyl
Primary Backing	:	Non - Woven
Total Thickness	:	8.0 mm
Pile Weight	:	750 g/m ² (22 oz/yd ²)
Number of Tufts	:	229100/m ²
Tufting Gauge	:	1/10"
Tile Size	:	50 cm x 50cm
Package	:	20 pcs per box (5m ²)
Recommended Installation	:	Brick or Quarter Turn

PERFORMANCE PARAMETERS

VOC Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
Reaction to Fire	EN ISO 9239-1:2002	Dfl-s1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	0.04m ² K/W
Impact Sound Insulation	ISO 140-8	ΔLw 23dB
Sound Absorption Level	EN ISO 11654	αw: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R ≥ 2.4