

A photograph of an office interior. In the foreground, a large, textured grey carpet tile covers the floor. In the middle ground, a wooden desk with a central cabinet and two black chairs is positioned. The background features a window with a view of an outdoor area, possibly a courtyard or garden, with some plants and a building. The lighting is bright, suggesting daytime. The overall scene is clean and professional.

SOLAR

CARPET TILES

SOLAR



SOLAR 7401 BROWN



SOLAR 7402 BEIGE



SOLAR 7403 GOLD



SOLAR 7501 SKY

SOLAR




SOLAR 7502 DARK BLUE



SOLAR 7503 OCEAN



SOLAR 7701 GREY

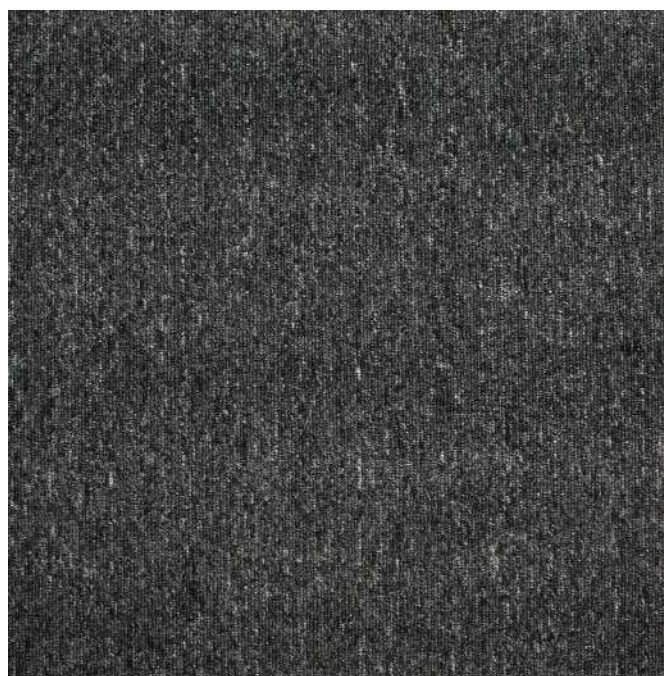

SOLAR 7702 BLACK

SOLAR CARPET TILES

SPECIFICATIONS

Style Name	:	Solar
Fiber	:	100% Olefin (Stan-Extra Durable)
Manufacturing Process	:	Tufted, Loop Pile
Yarn	:	BCF
Dye Method	:	Solution Dyed
Gauge	:	1/10 th
Pile Height	:	3 mm (± 0.2 mm)
Total Height	:	6 mm
Primary Backing	:	Non Woven (PES/PA)
Secondary Backing	:	Glass Fiber Reinforced PVC
Pile Weight	:	550 gms per sqm ($\pm 5\%$)
Total Weight	:	4500 gms per sqm ($\pm 5\%$)
Stitches per 10 CM	:	15 ($\pm 60/10$ cms)
Size	:	50 x 50 CM
Packing	:	20 PCS (5M ²) Per Box
Installation Method	:	Quarter Turn

PERFORMANCE PARAMETERS

Flammability	:	ASTM D-2859//FF 1-70//16CFR 1630 Pass 8/8
Smoke Density	:	ASTM E662 Less than 450
Static Propensity	:	AATCC - 134 Under 3.5KV
Color Fastness	:	5/5 on Grey Scale
Hexapod Test (Water)	:	ASTM D-5252 (+75%)



Quarter Turn