


# AMBITION



# AMBITION




AMBITION 8555 - MIDNIGHT BLUE

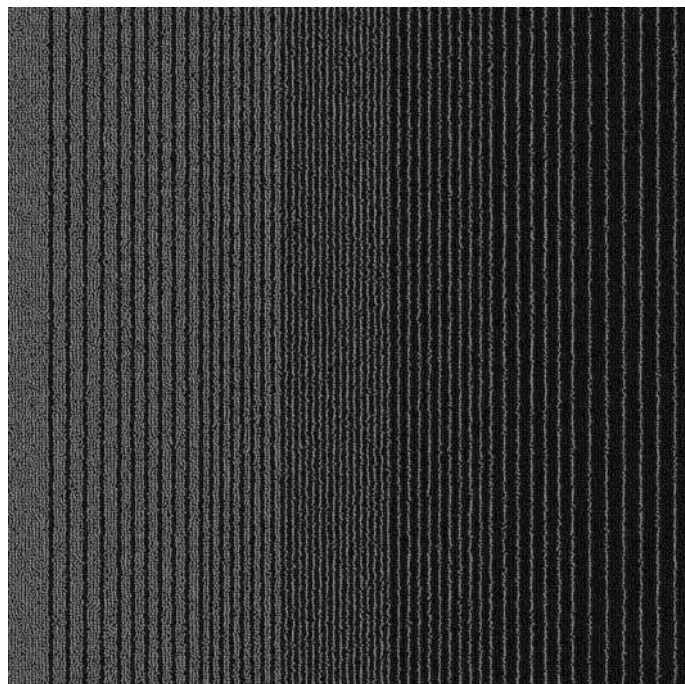

AMBITION 8575 - EBONY



AMBITION 8577 - LIVID

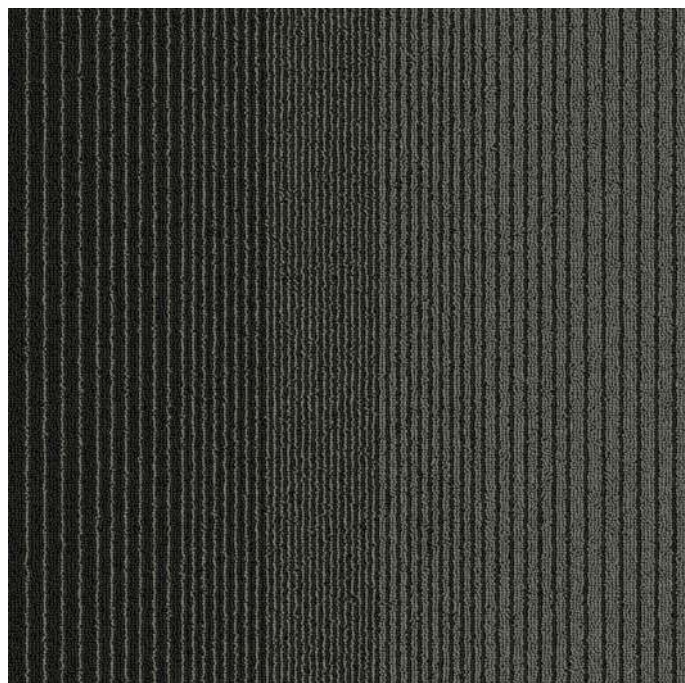

AMBITION 8571 - PLATINUM

# AMBITION CARPET TILES

## SPECIFICATIONS

STYLE NAME	:	AMBITION
CONSTRUCTION	:	LOOP
FIBER	:	100% OLEFIN
YARN TYPE	:	CABLE
DYE METHOD	:	SOLUTION DYED
GAUGE	:	1/10 <sup>TH</sup>
PILE HEIGHT	:	3.5 MM
TOTAL HEIGHT	:	5.5 MM
PILE WEIGHT	:	600 GM PER SQM ( $\pm 5\%$ )
NUMBER OF TUFTS	:	169420/M <sup>2</sup>
PRIMARY BACKING	:	NON WOVEN
SECONDARY BACKING	:	STABLESHIELD- 100% VINYL
TILE SIZE	:	50 X 50 CM
PACKING	:	20 PCS (5M <sup>2</sup> ) PER BOX
INSTALLATION METHOD	:	QUARTER TURN

## PERFORMANCE PARAMETERS

WEAR CLASSIFICATION	HEAVY CONTRACT	
VOC EMISSION	ASTM D5116-06	<0.5 mg/m <sup>2</sup> /hour (CRI GLP)
FLAMMABILITY	ASTM D-2859//FF 1-70//16CFR 1630	Pass 8/8
CRITICAL RADIANT FLUX	ASTM E648-08	Class 1
STATIC PROPENSITY	ISO 6356	0.2 kV
COLOR FASTNESS	AATCC/16	5/5 on Grey Scale
THERMAL RESISTANCE	ISO 8302	.04m <sup>2</sup> K/W
IMPACT SOUND INSULATION	ISO 140-8	$\Delta L_w$ 23dB
SOUND ABSORPTION LEVEL	EN ISO 11654	$\alpha_w$ : 0.15(H)
SOILING PROPENSITY	ASTM D 6540-00	4
DIMENSIONAL STABILITY	EN 986	< 0.20%
CASTOR CHAIR TEST	DIN 54324	R $\geq$ 2.4
SMOKE DENSITY	EN ISO 9239-1:2002	<450